



NITTA Tubing and Fittings

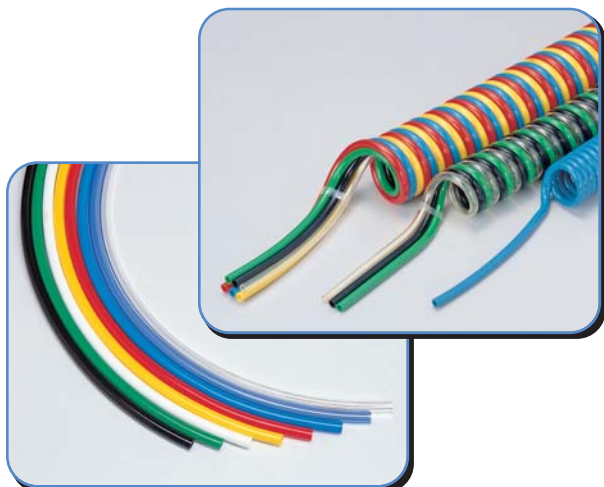

Nylon, Polyurethane and FR Tubing

- **Nylon (N1, N2, N5, S)** – Excellent oil and chemical resistance, good flexibility
- **Polyurethane (U1, U2, U5, UC, USC, UMC, UML)** – Very flexible and tight bend radius without kinking. Easy to route and install in confined spaces.
- **Flame-Resistant (FS, FW, FWU)**
- Inch and metric options, depending on type
- Versatile products used in many applications

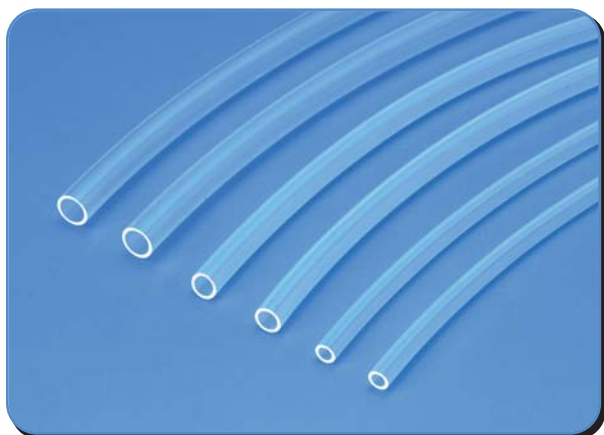

Fluorocarbon Resin Tubing

TP (FEP), TA (PFA)

- Very low fluoride ions/metals dissolution
- Excellent heat resistance
- Excellent water/chemical resistance
- Inch and metric options, depending on type
- Perfect for Cleanrooms and other applications requiring clean tubing



Polyolefin Resin Tubing

PL, PN (soft)

- Dust/bleeding free
- Low cost
- Excellent water/chemical resistance
- Very flexible
- Inch and metric options, depending on type
- Perfect for Cleanrooms and other applications requiring clean tubing



NITTA CORPORATION OF AMERICA

7605 Nitta Drive • Suwanee, GA 30024

1-800-221-3689 • Fax: 770-623-1398 • www.nitta.com

Nitta Corporation of
America is registered
to ISO 9001:2008



ISO 9001

“The NITTA Advantage” – Superior Product • Superior Quality • Superior Service

NITTA Tubing and Fittings



Chemifit® C1 Series Fittings

- Oil-free processing
- Excellent chemical resistance
- Clean packing after rinsing
- Fluid contact areas are non-metallic
- Chemifit product line is US FDA approved
- Ideal for Cleanrooms and other ultrapure applications
- Inch and metric



Chemifit® CSA Series Fittings

- High sealing performance
- Oil-free processing
- Easy to assemble
- Chemifit product line is US FDA approved
- Ideal for Cleanrooms and other ultrapure applications
- Inch and metric



PushOne Fittings

- Fast and easy “push-to-connect” tubing connection without tools.
- Thread sealing compound pre-applied
- Time savings means less downtime
- Inch and metric



QuickSeal Fittings

- Robust design – All brass or stainless construction
- Fast and easy tubing connection
 1. Loosen nut (no need to remove)
 2. Insert tubing
 3. Turn nut one full turn after finger tight – You're done!
- Nitta exclusive sleeve design – better sealing – replacement sleeves available, making the fitting reusable – lower MRO costs
- Great for vacuum applications
- Inch and metric